


GP Batteries

Product Specification

Model no.: E211

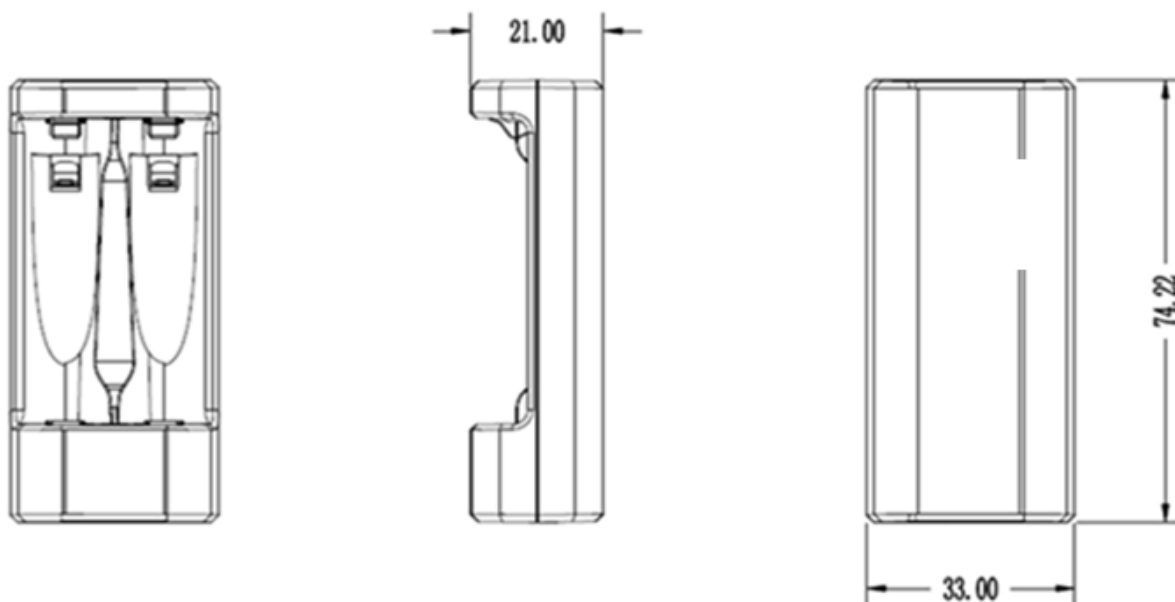

Product Name	: USB 2-Slot Charger E211
Input	: DC5V 1A
Charging Channels	: 1 independent channel ; 2 slots/channel for 2 pcs AA/AAA Ni-MH batteries
Output Voltage	: 2.8V
Charging Current	: 300mA approx for AA/AAA Ni-MH batteries
Charging Time	: Approx. 480 Min for 2000mAh ; Approx. 190 Min for 800mAh
Trickle Charging Current	: 50mA approx for AA/AAA Ni-MH batteries
Standby current at no input	: <0.1mA
Operation Temperature	: 0°C to 35°C
LED Indication	: Green LED ON for 0.5 second after just USB power input Charging in progress - Green LED slow flashing Fully charged – Green LED ON Bad/Primary Batteries inserted – Green LED fast flash
Safety protection	: 1) Timer protection – 10 hours 2) -dv
Dimensions	: 33 (L) x 74.2 (W) x 21 (H) mm
Weight	: 18 g (approx.)
Certification	: CE, FCC, Rohs
Warranty Period	: 12 months from ex-factory date



Member
Gold Peak Group

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.