


Revision History

| Revision | Date | Initiator | Reason for Change |
|----------|------------|-------------|---|
| 0 | 2009/12/10 | Anny Xie | New Issue |
| 1 | 2012/03/19 | Irence Ling | Modify the "Shelf Life" : "Not less than 90% of the service capacity within first year storage at $20 \pm 2^{\circ}\text{C}$ $55 \pm 20\%\text{RH}$ " |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |


| Prepared By | Approved By |
|------------------|---|
| Irence Ling | Edward Chan |
| |  |
| Date: 2012/03/19 | Date: 2012/03/19 |

GPI International Limited


Gold Peak Building, 8/F, 30 Kwai Wing Road,
Kwai Chung, New Territories, Hong Kong.
Tel: (852) 2484 3333 Fax: (852) 24805912
Email: gpii@goldpeak.com
Website: <http://www.gpbatteries.com.hk>

Description : Alkaline High Voltage Battery
Nominal Voltage : 1.5Volts
Nominal Dimensions : Ø15.60mmx5.95mm
Applications : Electronic toys, camera,...etc.
Average Weight : 2.9g
Date Code : Unless otherwise specified, each batteries will carry a numeric year code and analogue month code
Shelf Life : **Not less than 90% of the service capacity within first year storage at 20 ± 2 °C 55 ± 20 %RH**
Close Circuit Voltage : 1.35 Volts (min.)(load resistor 300Ω at 20 ± 2 °C for 0.1 to 2 seconds)
Nominal Service Life : 18hrs (at 150Ω load)
 (to 0.9V at 20 ± 2 °C)
Average Service Capacity : 190mAh(at 600Ω load)
 (to 0.9V at 20 ± 2 °C)

Model No.: **GPPX625AF**

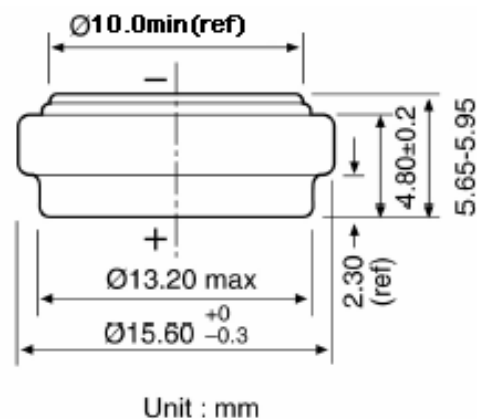

Typical Discharge characteristics at 20 ± 2 °C

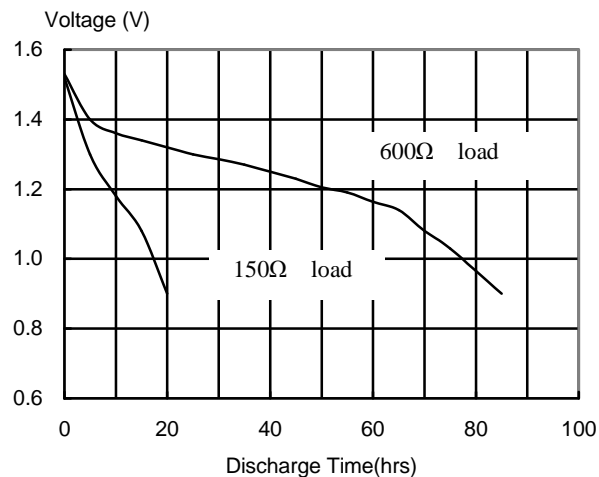

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.